


SPECIFICATION SHEET

MODEL: UC-M Excellence i

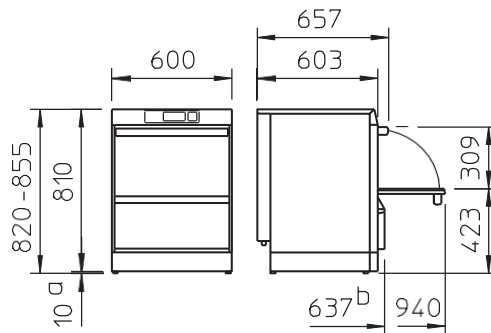

TECHNICAL INFORMATION

Dimensions	600w x 603d x 820-855h
Rack Dimension	500 x 500
Clear Entry Height	309
Rinse Water Consumption	2L Per Cycle

WATER CONNECTIONS

Connection Point	3/4 inch (19mm)
Inlet Temperature	35c Max
Flow Rate	4 L/Min
Flow Pressure	1.4 - 6 bar

ELECTRICAL

Single Phase (Standard)	220 V - 240 V / 1 N~, 50 Hz, 3.4Kw, 15[A] fuse protection 220 V - 240 V / 1 N~, 50 Hz, 4.4Kw, 20[A] fuse protection
3 Phase (optional)	380 V - 415 V / 3N~, 50 Hz, 7.9kW, 15[A] fuse protection 380 V - 415 V / 3N~, 50 Hz, 9.9kW, 20[A] fuse protection

GENERAL DATA

Weight (Net/Gross)	85/95Kg
Tank Capacity	15.3L
Noise Emission	55dB(A)
Cycle Times	120/90/60 Seconds (Adjustable)

STANDARD INCLUSIONS

1x 15amp Plug and Lead
1x 1m Flexible Water Connection Hose
1x 1m Flexible Waste Hose
1x 500 x 500, 5 Row Glass Rack
1x Pre Filter Assembly, Wall Bracket & Cartridge
1x S/S Insert to allow 14" x 17" Glass Racks
1x Chemical Starter Pack

STANDARD FEATURES

Touch display with glass surface
 Vario power warewashing system for adjustable pressure
 Quadruple filtration system with clouding sensor
 Fully insulated
 Drain pump
 Rinse booster pump
 Integrated chemical dosing with storage tanks for
 rinse aid and detergent
 Fully integrated reverse osmosis for polish free results