


SPECIFICATION SHEET

MODEL: UC-S Excellence i

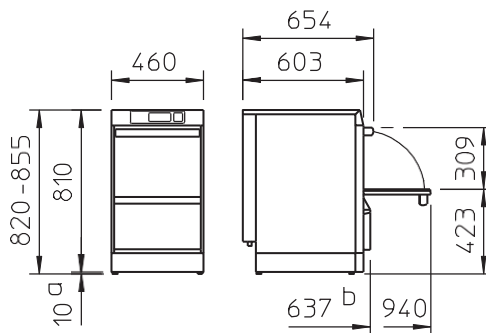

TECHNICAL INFORMATION

Dimensions	460w x 603d x 820-855h
Rack Dimension	400 x 400 or 14x17"
Clear Entry Height	309
Rinse Water Consumption	1.8L Per Cycle

WATER CONNECTIONS

Connection Point	3/4 inch (19mm)
Inlet Temperature	Cold - 35c Max
Flow Rate	Minimum 3 L/Min
Flow Pressure	1.4 - 6 bar

ELECTRICAL

Single Phase (Standard)	220 V - 240 V / 1 N~, 50 Hz, 3.4Kw, 15[A] fuse protection
	220 V - 240 V / 1 N~, 50 Hz, 4.4Kw, 20[A] fuse protection
3 Phase (optional)	380 V - 415 V / 3N~, 50 Hz, 7.9kW, 15[A] fuse protection
	380 V - 415 V / 3N~, 50 Hz, 9.9kW, 20[A] fuse protection

Weight (Net/Gross)	79/88Kg
Tank Capacity	9.5L
Noise Emission	55dB(A)
Cycle Times	120/90/60 Seconds (Adjustable)

STANDARD INCLUSIONS

1x 15amp Plug and Lead
1x 1m Flexible Water Connection Hose
1x 1m Flexible Waste Hose
1x 400 x 400, 4 Row Glass Back
1x Pre Filter Assembly, Wall Bracket & Cartridge
1x Chemical Starter Pack
1 x S/S insert to allow 14" x 17" glass racks

STANDARD FEATURES

Touch display with glass surface
 Vario power warewashing system for adjustable pressure
 Quadruple filtration system with clouding sensor
 Fully insulated
 Drain pump
 Rinse booster pump
 Integrated chemical dosing with storage tanks for
 rinse aid and detergent
 Fully integrated reverse osmosis for polish free results